



FRR-01P-8L5-751

1.25Gbps LC Connectorized GaAs PIN plus AGC Pre-amplifier

FEATURES:

- Pre-aligned LC-type receptacle for optical fiber communication.
- Designed for Small Form Factor transceivers.
- Suitable for 1.25Gbps application.
- Single power supply +3.3V.



ELECTRO-OPTICAL CHARACTERISTICS: (T_A=25°C)

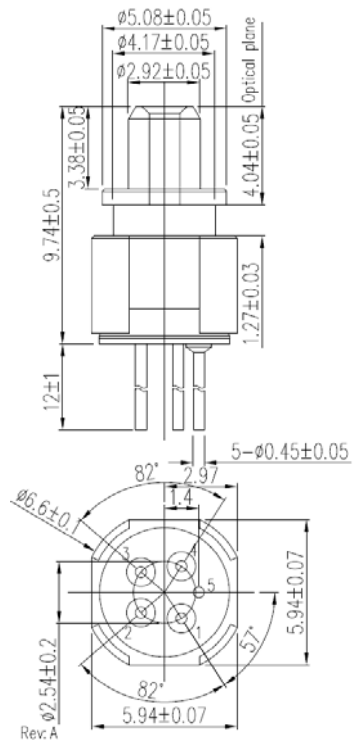
PARAMETERS	SYMBOL	MIN	TYP	MAX	UNIT	TEST CONDITIONS
Power Supply	V _{CC}	3.0	3.3	3.6	V	
Supply Current	I _{CC}		28	35	mA	no loads
Differential Responsivity	R _d	6.0	10	16	mV/μW	R _{load} = 100ohm, P = -24dBm, λ=850nm
Single Ended Responsivity	R _s	3.0	5.0	8.0	mV/μW	R _{load} = 50ohm, P = -24dBm, λ=850nm
Small-Signal Bandwidth	BW	730			MHz	P = -24dBm
Low-Frequency Cut off	LF			115	kHz	
Rise / Fall Time(20 % ~ 80 %)	tr/tf			400	ps	P = -24dBm, λ=850nm
Saturation Power	P _{Sat}	0			dBm	
Single Ended Output Impedance	R _O		50		ohm	
Wavelength	λ	770		860	nm	
Sensitivity				-25	dBm	λ=850nm,@1244.16Mbps, PRBS7, ER=10dB, BER=1E-10

ABSOLUTE MAXIMUM RATINGS:

PARAMETERS	MIN	MAX	UNIT	TEST CONDITIONS
Storage Temperature	-40	100	°C	
Operating Temperature	-40	85	°C	
Lead Solder Temperature		260	°C	10 seconds

OUTLINE DIMENSIONS:

• Unit: mm

**Pinout:**

Pin no.	Function
1	Dout(+)
2	Vcc
3	Isource
4	Dout(-)
5	Gnd