


# SS-Flat Drop Cables (TB type)

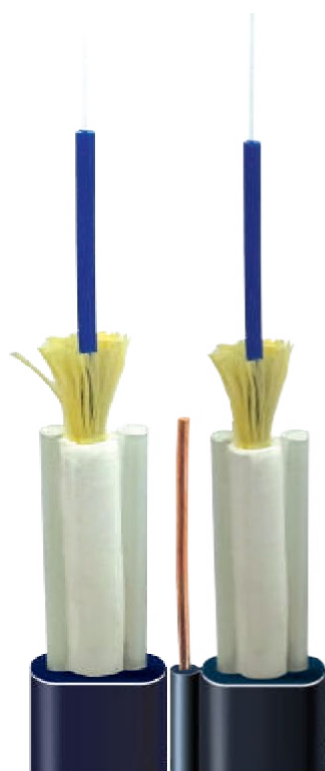

## Description

- Bend insensitive Single-mode fibers with Tight buffered cable
- Selection design for Dielectric or Toning cable
- Compact drop cable construction
- Suitable indoor for 2.9mm inside riser cable
- Good weather resistance outside cable
- Compatible with usual splitter for sheath removal


## Application

- Universal drop cable indoor or outdoor use
- Aerial mid-span access, Duct, Direct buried

## Features

- Excellent mechanical and environmental characteristics
- RoHS compliance

## Cable Cross Section

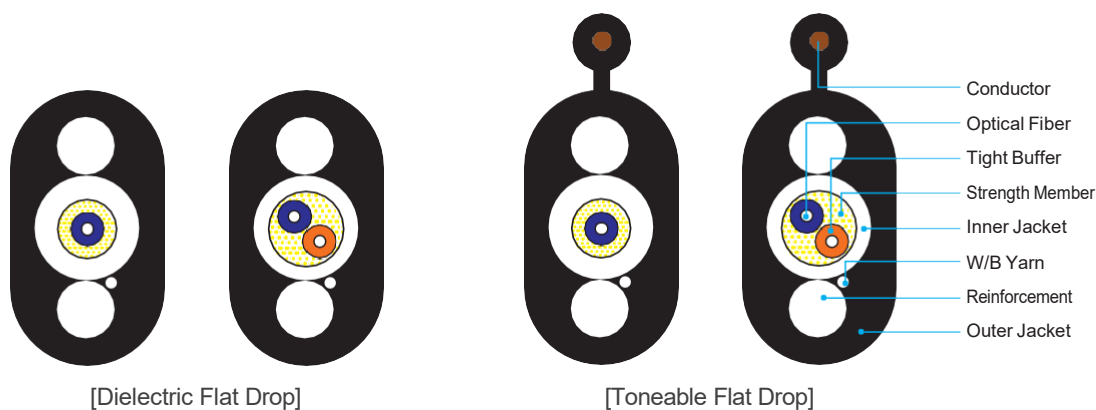

## Standard Cable Information

Type	Number of Fiber	Cable Diameter (mm)	Tensile Load		Crush resistance (N/100mm)	Min. Bending Radius	
			Installation (N)	Operating (N)		Unloaded (mm)	Loaded (mm)
Flat Drop (Dielectric)	1C	4.5*8.0	1350	405	1000N	80	160
	2C	4.5*8.0	1350	405	1000N	80	160
Flat Drop (Toneable)	1C	4.5*10.0	1350	405	1000N	100	200
	2C	4.5*10.0	1350	405	1000N	100	200

**Note.** Cable construction and performance available on customer request.