

400G QSFP56-DD DR4 Optical Transceiver

PN: VD-4CDR4CP-AA

Product Overview

Vitex VD-4CDR4CP-AA is designed for 400G optical connections of up to 500m. The transceiver is a fully integrated optical transceiver modulated using 4-level pulse amplitude modulation (PAM4) format that transmits and receives optical signals with aggregated data rate of 425Gbps over 4 lanes 1310nm each running at 106.25Gbps. They are compliant with QSFP-DD MSA and 400GBASE-DR4 standards.

Features

- Compliant with IEEE Std 802.3bs
- Compliant with 400G-DR4 optical specifications
- Compliant with QSFP-DD MSA
- Compliant with CMIS4.0 Management interface specifications
- Parallel MPO-12 receptacle
- 4 x 106.25Gbps PAM4 parallel lanes
- 8 x 53.125Gbps PAM4 electrical interface
- Transmission distance up to 500m SMF
- Single 3.3V power supply
- Power consumption <8W
- Commercial operating temperature: 0 °C to 70 °C
- RoHS Compliant

Applications

- 400G BASE-DR4 Ethernet
- Data Center

Ordering Information

Part Number	Description
VD-4CDR4CP-AA	400G QSFP56-DD DR4, 500m SMF, 1310nm, MPO12, C-temp

General Specifications

Parameter	Symbol	Min	Typical	Max	Unit	
Storage Temperature	T _s	-40		85	°C	
Relative Humidity	RH	15		85	%	
Supply Voltage (Maximum)	V _{CC}	-0.5		3.6	V	
Supply Voltage (Recommended)	V _{CC}	3.13	3.3	3.47	V	
Operating Case Temperature	TC	0		70	°C	
Data Rate PER Channel			53.125 ±100ppm		Gbps	
Modulation Format			PAM4			

Optical – Transmitter

Parameter	Symbol	Min	Typical	Max	Unit	Remarks
Lane wavelengths	λ	1304.5	1311	1317.5	nm	
Side-mode suppression ratio	SMSR	30			dB	
Average launch power, each lane	P _{avg}	-2.9		4	dBm	
Outer Optical Modulation Amplitude, each lane	OMA _{outer}	-0.8		4.2	dBm	
OMA minus TDECQ		-2.2			dBm	
Transmitter and dispersion penalty eye closure for PAM4, each lane	TDECQ			3.4	dB	
Extinction Ratio	ER	3.5			dB	
Average launch power of OFF	P _{off}			-15	dBm	
Optical Return Loss Tolerance	ORL			21.4	dB	
Transmitter reflectance				-26	dB	

Optical – Receiver

Parameter	Symbol	Min	Typical	Max	Unit	Remarks
Lane wavelengths	λ	1304.5	1311	1317.5	nm	
Receiver Sensitivity each lane (OMA _{outer})				-4.4	dBm	1
Average receive power (P _{avg})	P _{avg}	-5.9		4	dBm	
Receive power, each lane (OMA _{outer})	OMA			4.2	dBm	
Optical Reflectance	ORL			-26	dB	
LOS De-Assert	LOS _D			-10	dBm	
LOS Assert	LOS _A	-16			dBm	
LOS Hysteresis		0.5			dB	

1. Measured with PRBS31Q test pattern, 53.125GBd, PAM4, BER<2.4E-4.

Electrical – Transmitter


Parameter	Symbol	Min	Typical	Max	Unit	Remarks
Module Supply Current	I _{CC}			2.55	A	
Power Dissipation	P _D			8.0	W	
Input Differential Impedance	Z _{IN}		100		Ω	
Differential Data Input Swing	V _{IN, P-P}	180		900	mV _{P-P}	

Electrical – Receiver

Parameter	Symbol	Min	Typical	Max	Unit	Remarks
Output Differential Impedance	Z _O		100		Ω	
Differential Data Output Swing	V _{OUT, P-P}	300		850	mV _{P-P}	1
Transition Time (20% to 80%)	T _r ,T _f	9.5			ps	

1. Internally AC coupled but requires an external 100Ω differential load termination.

Electrical Connector Layout

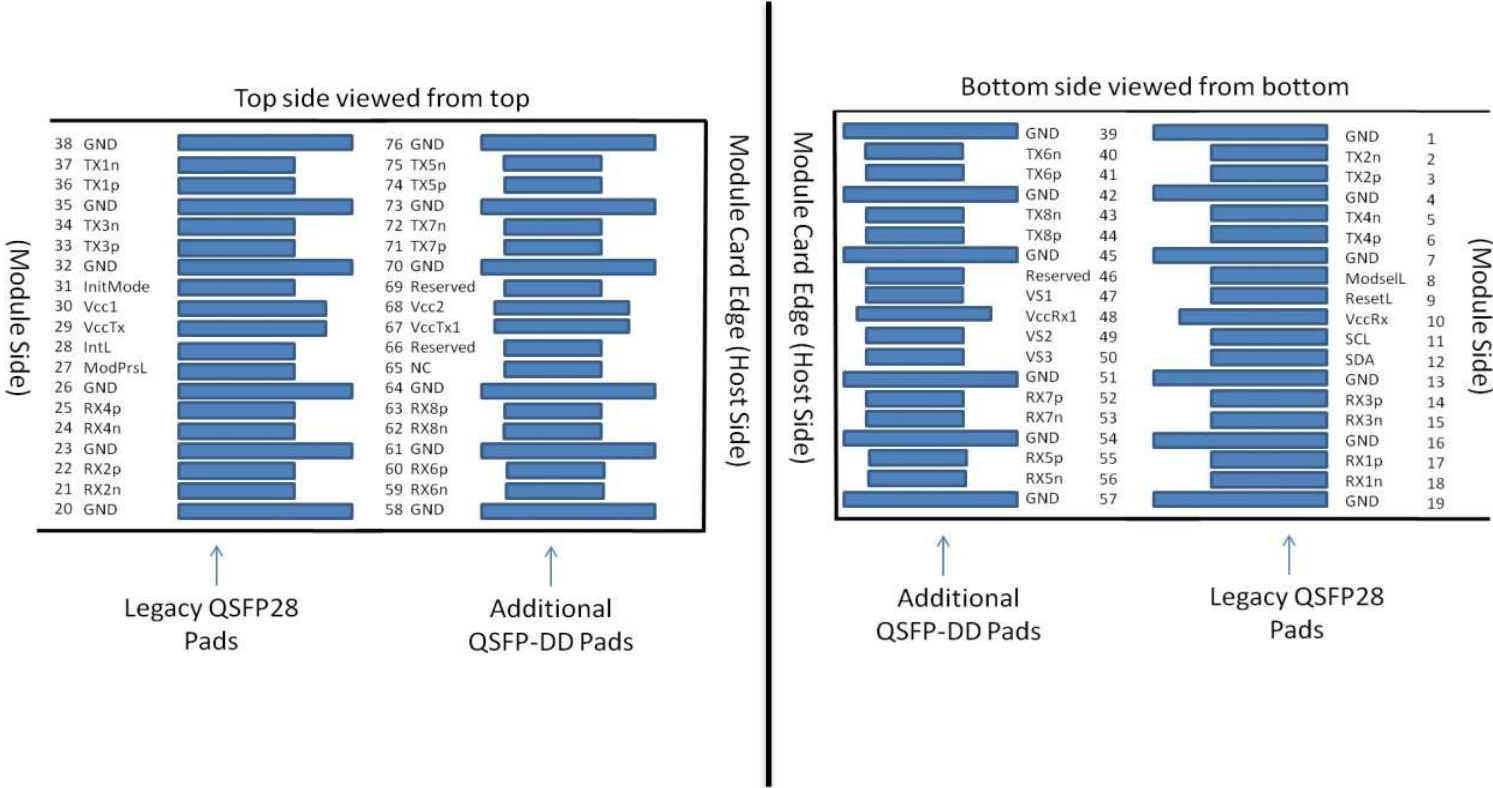

Electrical Pin Definition

PIN #	Symbol	Description	Remarks
1	GND	Ground	1
2	Tx2n	Transmitter Inverted Data Input	
3	Tx2p	Transmitter Non-Inverted Data output	
4	GND	Ground	1
5	Tx4n	Transmitter Inverted Data Input	
6	Tx4p	Transmitter Non-Inverted Data output	
7	GND	Ground	1
8	ModSelL	Module Select	
9	ResetL	Module Reset	
10	VccRx	3.3V Power Supply Receiver	2
11	SCL	2-Wire serial Interface Clock	
12	SDA	2-Wire serial Interface Data	
13	GND	Ground	1
14	Rx3p	Receiver Non-Inverted Data Output	
15	Rx3n	Receiver Inverted Data Output	
16	GND	Ground	1
17	Rx1p	Receiver Non-Inverted Data Output	
18	Rx1n	Receiver Inverted Data Output	
19	GND	Ground	1
20	GND	Ground	1
21	Rx2n	Receiver Inverted Data Output	
22	Rx2p	Receiver Non-Inverted Data Output	
23	GND	Ground	1
24	Rx4n	Receiver Inverted Data Output	
25	Rx4p	Receiver Non-Inverted Data Output	
26	GND	Ground	1
27	ModPrsL	Module Present	
28	IntL	Interrupt	
29	VccTx	3.3V power supply transmitter	2
30	VccI	3.3V power supply	2
31	Init Mode	Initialization mode	
32	GND	Ground	1
33	Tx3p	Transmitter Non-Inverted Data Input	
34	Tx3n	Transmitter Inverted Data Output	
35	GND	Ground	1
36	Tx1p	Transmitter Non-Inverted Data Input	
37	Tx1n	Transmitter Inverted Data Output	
38	GND	Ground	1
39	GND	Ground	1
40	Tx6n	Transmitter Inverted Data Input	
41	Tx6p	Transmitter Non-Inverted Data output	
42	GND	Ground	1


VD-4CDR4CP-AA Product Specification



43	Tx8n	Transmitter Inverted Data Input	
44	Tx8p	Transmitter Non-Inverted Data output	
45	GND	Ground	1
46	Reserved	For Future Use	3
47	VS1	Module Vendor Specific 1	3
48	VccRx1	3.3V Power Supply	2
49	VS2	Module Vendor Specific 2	3
50	VS3	Module Vendor Specific 3	3
51	GND	Ground	1
52	Rx7p	Receiver Non-Inverted Data Output	
53	Rx7n	Receiver Inverted Data Output	
54	GND	Ground	1
55	Rx5p	Receiver Non-Inverted Data Output	
56	Rx5n	Receiver Inverted Data Output	
57	GND	Ground	1
58	GND	Ground	1
59	Rx6n	Receiver Inverted Data Output	
60	Rx6p	Receiver Non-Inverted Data Output	
61	GND	Ground	1
62	Rx8n	Receiver Inverted Data Output	
63	Rx8p	Receiver Non-Inverted Data Output	
64	GND	Ground	1
65	NC	No Connect	3
66	Reserved	For Future Use	3
67	VccTx1	3.3V power supply	2
68	Vcc2	3.3V power supply	2
69	Reserved	For Future Use	3
70	GND	Ground	1
71	Tx7p	Transmitter Non-Inverted Data Input	
72	Tx7n	Transmitter Inverted Data Output	
73	GND	Ground	1
74	Tx5p	Transmitter Non-Inverted Data Input	
75	Tx5n	Transmitter Inverted Data Output	
76	GND	Ground	1

1. QSFP-DD uses common ground (GND) for all signals and supply (power). All are common within the QSFP-DD module and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal common ground plane.
2. VccRx, VccRx1, Vcc1, Vcc2, VccTx and VccTx1 shall be applied concurrently. VccRx, VccRx1, Vcc1, Vcc2, VccTx and VccTx1 may be internally connected within the module in any combination. The connector Vcc pins are each rated for a maximum current of 1000mA.
3. All Vendor Specific, Reserved and No Connect pins may be terminated with 50ohms to ground on the host. Pad 65 (No Connect) shall be left unconnected within the module. Vendor specific and reserved pads shall have an impedance to GND that is greater than 10kohms and less than 100pF.

Mechanical Dimension

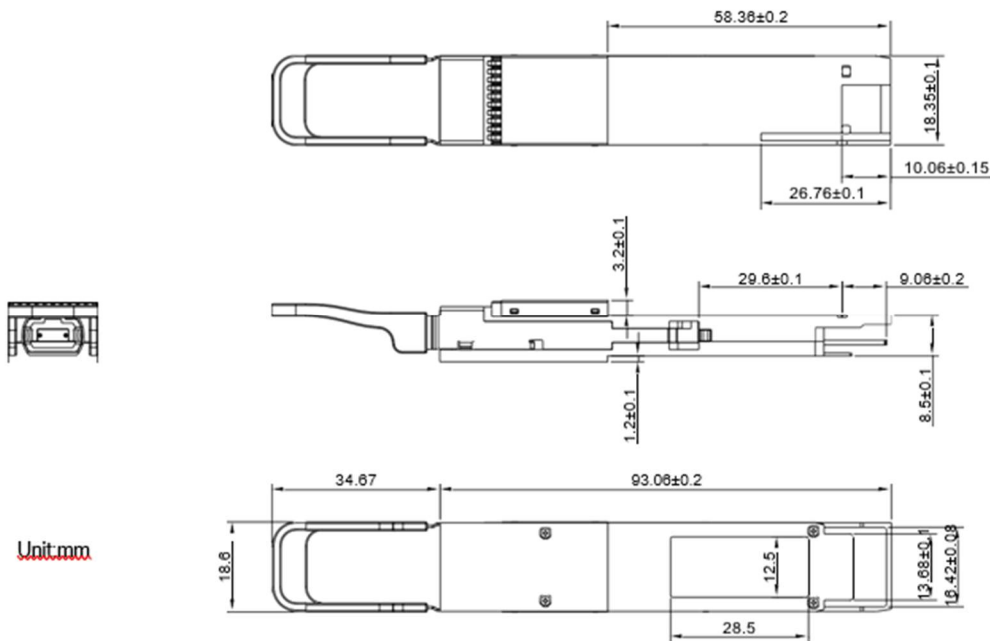

Revision History

Date	Rev	Description
08/26/2021	1.0	Release version
02/13/2025	2.0	New branding guidelines

For more information

Vitex LLC
32 Mercer St
Hackensack, NJ 07601

201-296-0145
info@vitextech.com
www.vitextech.com

