

---

## 10Gb SFP+ Transceiver VS-10SR1CS-AA

---

### Product Overview

Vitex VS-10SR1CS-AA SFP+ module supports 8.5-10.5Gb/s data rates, operates from 0 to 70°C, and transmits up to 300m over MMF using an 850nm VCSEL and PIN receiver. It features a duplex LC connector, single 3.3V power, low power consumption, and robust EMI/ESD protection.

### Features

- Supports 8.5Gb/s to 10.5Gb/s bit rates
- 0 to 70°C operating case temperature
- SFP+ package with duplex LC receptacle connector
- Hot-pluggable capability
- Single 3.3V power supply
- 850nm VCSEL transmitter and high performance PIN receiver
- Up to 300m transmission distance over MMF
- Low power dissipation
- SFI electrical interface
- Low EMI and excellent ESD protection
- Built-in Digital Diagnostic Monitoring (DDM) function
- Class I laser safety standard IEC-60825 compliant
- RoHS-6 compliance

### Applications

- 10GBASE-SR/SW
- 10Gb/s Fiber Channel

### Standards

- Complies with SFP+ MSA, Complies with SFF-8472
- Compliant with IEEE 802.3ae
- Complies with FCC 47 CFR Part 15, Class B
- Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007

### Ordering Information

Part Number	Description
VS-10SR1CS-AA	10G SFP+ SR, 300m MMF, 850nm, Duplex-LC, C-temp

## General Specifications

Parameter	Symbol	Min	Typical	Max	Unit	Remarks
Storage Ambient Temperature	TSTG	-40		85	°C	
Operating Case Temperature	Tc	0		70	°C	
Operating Humidity	OH	5		95	%	
Power Supply Voltage (Maximum)	VCC	-0.5		3.6	V	
Power Supply Voltage (Recommended)	VCC	3.13	3.3	3.47	V	
Power Supply Consumption	P			1	W	
Date Rate		8.5		10.5	Gbps	
Data Rate Drift		-100		+100	PPM	

## Optical – Transmitter

Parameter	Symbol	Min	Typical	Max	Unit	Remarks
Centre Wavelength	$\lambda_C$	840	850	860	nm	
Average Output Power		-7		-1	dBm	Launched into MMF Fiber
Average Power of OFF Transmitter				-30	dBm	
Extinction Ratio	ER	3			dB	
Transmitter and Dispersion Penalty	TDP			3.9	dB	

## Optical – Receiver

Parameter	Symbol	Min	Typical	Max	Unit	Remarks
Operating Wavelength	$\lambda_C$	840		860	nm	
Sensitivity (OMA)	R <sub>SENSE1</sub>			-11.1	dBm	PRBS2 <sup>31</sup> -1@10.3125Gbps BER $\leq 1 \times 10^{-12}$ Measured with the worst ER
Stressed Receiver Sensitivity (OMA)	R <sub>SENSE2</sub>			-7.5	dBm	Measured with stressed signal at TP3 for BER = $10^{-12}$ according to IEEE 802.3ae
Saturation Optical Power	SAT	-1			dBm	
LOS De-Assert	LOS <sub>D</sub>			-15	dBm	
LOS Assert	LOS <sub>A</sub>	-25			dBm	
LOS Hysteresis	HYS	0.5		5	dB	


Electrical – Transmitter

Parameter		Symbol	Min	Typical	Max	Unit
Data Input Differential Swing			100		1000	mV
Input Differential Impedance			85	100	115	$\Omega$
TX Disable	Disable		2		VCC+0.3	V
	Enable		-0.3		0.8	V
TX Fault	Fault		2.4		VCC <sub>HOST</sub>	V
	Normal		-0.3		0.4	V

Electrical – Receiver

Parameter	Symbol	Min	Typical	Max	Unit
Differential data output swing	Vout	350		850	mV
Rx_LOS Output Voltage - High	High	2.4		VCC <sub>HOST</sub>	V
Rx_LOS Output Voltage - Low	Low	-0.3		0.4	V
Output Rise Time, 20%~80%	TR	28			ps
Output Fall Time, 20%~80%	TF	28			ps

Electrical Connector Layout

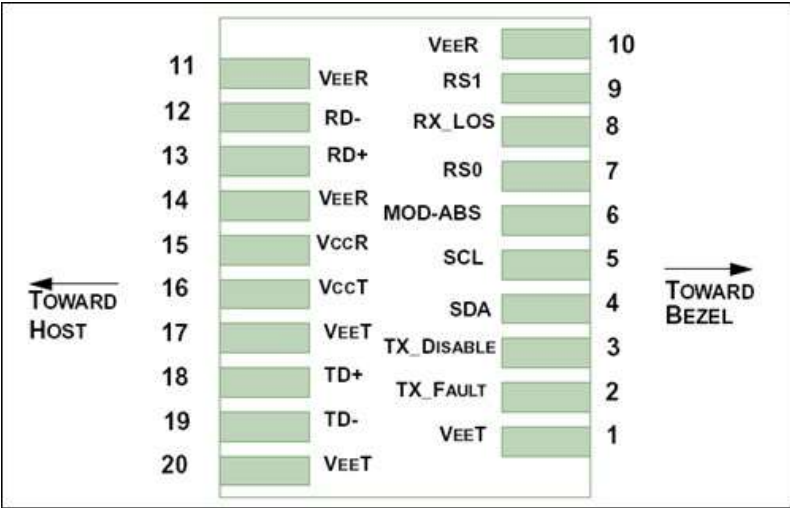

## Electrical Pin Definition

PIN #	Symbol	Description	Remarks
1	V <sub>EE</sub> T	Transmitter Ground	
2	TX_Fault	Transmitter Fault Indication	Low: normal; High: abnormal
3	TX_Disable	Transmitter Disable	Low: transmitter on; High: transmitter off
4	SDA	SDA	The data line of two wire serial interface
5	SCL	SCL	The clock line of two wire serial interface
6	MOD_ABS	Module Absent	Connected to V <sub>EE</sub> T or V <sub>EE</sub> R in the module
7	RS0	Not Connected	
8	RX_LOS	Loss of Signal	Low: signal detected; High: loss of signal
9	RS1	Not Connected	
10	VEER	Receiver Ground	
11	VEER	Receiver Ground	
12	RD-	Inv. Received Data Out	AC-coupled, CML
13	RD+	Received Data Out	AC-coupled, CML
14	V <sub>EE</sub> R	Receiver Ground	
15	V <sub>CC</sub> R	Receiver Power	
16	V <sub>CC</sub> T	Transmitter Power	
17	V <sub>EE</sub> T	Transmitter Ground	
18	TD+	Transmit Data In	AC-coupled, CML
19	TD-	Inv. Transmit Data In	AC-coupled, CML
20	V <sub>EE</sub> T	Transmitter Ground	

## Revision History

Date	Rev	Description
07/15/2024	1.0	Release version
01/24/2025	1.1	New branding guidelines

## For more information

**Vitex LLC**

32 Mercer St.  
Hackensack, NJ 07601

201-296-0145  
info@vitextech.com  
www.vitextech.com

